


Dimensions in mm.

**FEATURES
CARATTERISTICHE**

MODEL MODELLO	103 - H7126 - 1740 (103 - H7126 - 1710)
BASIC STEP ANGLE	$1.8^\circ \pm 0.09^\circ$
BIPOLAR CURRENT (Amp)	4
UNIPOLAR CURRENT (Amp)	
RESISTANCE (Ohm)	0.48
INDUCTANCE (mH)	2.2
BIPOLAR HOLDING TORQUE (Ncm)	165
UNIPOLAR HOLDING TORQUE (Ncm)	
ROTOR INERTIA ($\text{Kg} \cdot \text{m}^2 \times 10^{-7}$)	360
THEORETICAL ACCELERATION ($\text{rad} \times \text{sec}^{-2}$)	45800
BACK E.M.F. (V/Krpm)	31
MASS (Kg)	1
LEADS CODE	V

**TORQUE/SPEED CURVE
CURVA DI COPPIA/VELOCITÀ**

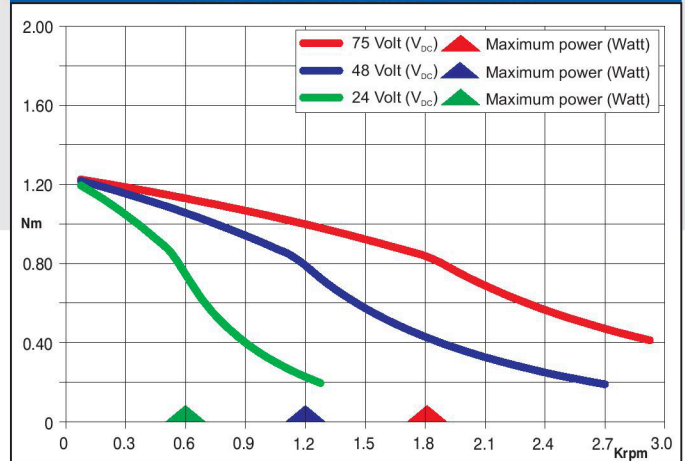

SANYO DENKI CO., Ltd (JAPAN)

Codes between brackets refer to double shaft models.
Le sigle fra parentesi si riferiscono ai modelli bialbero.

