



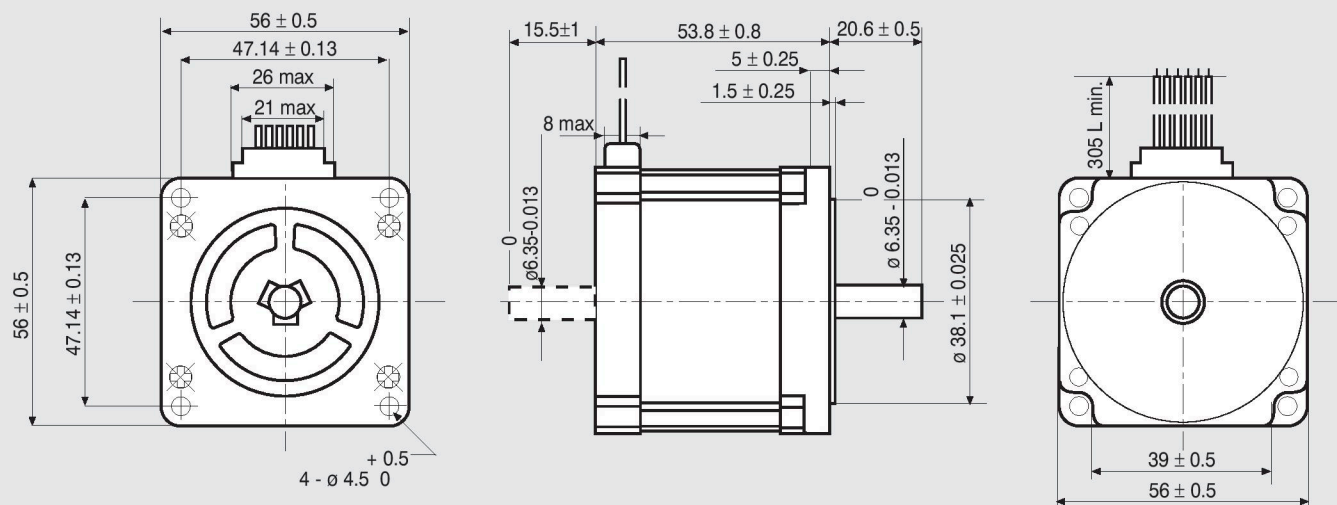

Dimensions in mm.

FEATURES CARATTERISTICHE		
MODEL MODELLO	103 - H7123 - 0740 (103 - H7123 - 0710)	
BASIC STEP ANGLE	$1.8^{\circ} \pm 0.09^{\circ}$	
BIPOLAR CURRENT	(Amp)	2.2 ^(*)
UNIPOLAR CURRENT	(Amp)	3
RESISTANCE	(Ohm)	0.77
INDUCTANCE	(mH)	1.6
BIPOLAR HOLDING TORQUE	(Ncm)	110
UNIPOLAR HOLDING TORQUE	(Ncm)	85
ROTOR INERTIA	(Kgm ² x 10 ⁻⁷)	210
THEORETICAL ACCELERATION	(rad x sec. ⁻²)	50000
BACK E.M.F.	(V/Krpm)	20
MASS	(Kg)	0.65
LEADS CODE	IV	

Codes between brackets refer to double shaft models.
Le sigle fra parentesi si riferiscono ai modelli bialbero.

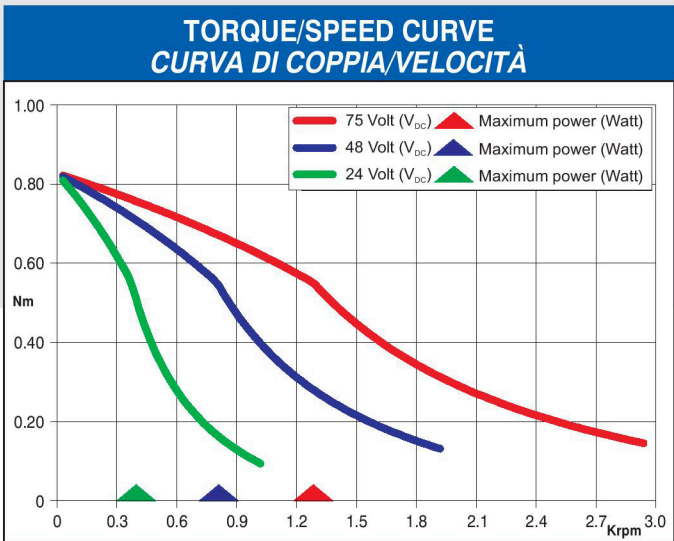

^(*) Bipolar series connection.
^(*) Collegamento bipolare serie.

