


T IS THE EARTH TERMINAL.

Dimensions in mm.

FEATURES CARATTERISTICHE		MODEL MODELLO	SM2862 - 5055
BASIC STEP ANGLE			1.8° ± 0.09°
BIPOLAR PARALLEL CURRENT		(Amp)	2
RESISTANCE		(Ohm)	3.2
INDUCTANCE		(mH)	25
BIPOLAR HOLDING TORQUE		(Ncm)	700
ROTOR INERTIA		(Kgm ² x 10 ⁻⁷)	3000
THEORETICAL ACCELERATION		(rad x sec. ⁻²)	23300
BACK E.M.F.		(V/Krpm)	350
MASS		(Kg)	2.9
INTERNATIONAL STANDARDS			UL, CSA, CE, RoHS
INSULATION VOLTAGE		(V)	250 V _{AC} (350 V _{DC})
PROTECTION DEGREE - INSULATION CLASS			IP43 - F
LEADS CODE			V

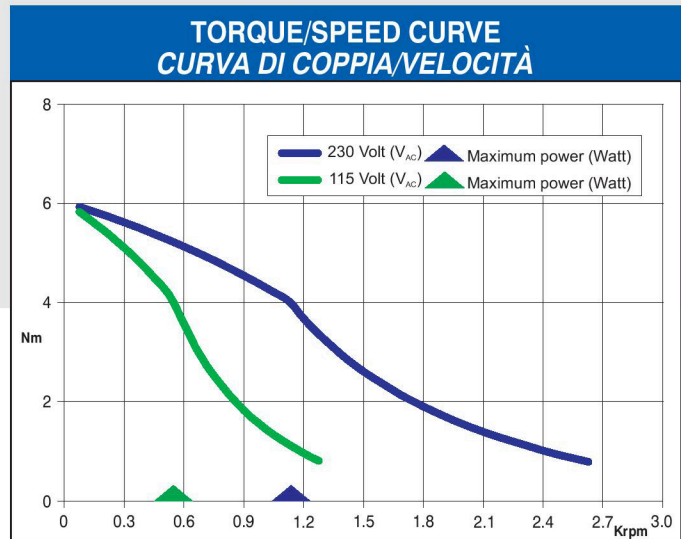

SANYO DENKI CO., Ltd (JAPAN)

