



VM 1KOM


VM SERIES



Dimensions (Unit:mm)

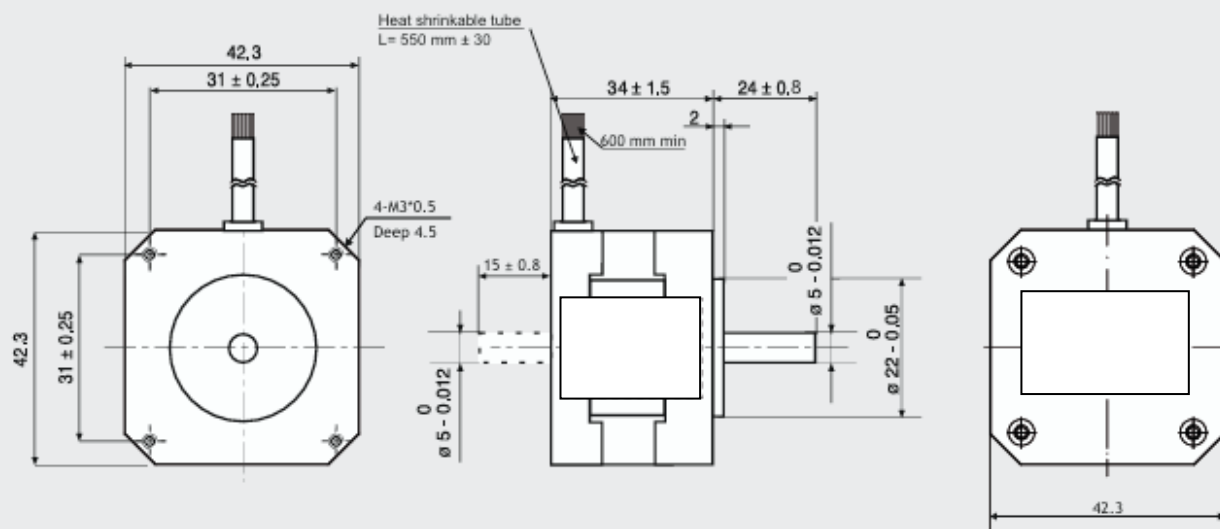

DOUBLE SHAFT MOTORS ONLY.



FEATURES

MODEL	VM 1KOM (VM 1KOM-RS)
BASIC STEP ANGLE	1.8° ± 0.09°
BIPOLAR CURRENT (Amp)	0.7 ⁽¹⁾
UNIPOLAR CURRENT (Amp)	1.0
RESISTANCE (Ohm)	3.5
INDUCTANCE (mH)	3.0
BIPOLAR HOLDING TORQUE (Ncm)	26
UNIPOLAR HOLDING TORQUE (Ncm)	20
ROTOR INERTIA (Kg·m ² × 10 ⁻⁷)	34
MASS (Kg)	0.2
INTERNATIONAL STANDARDS	CE
PROTECTION DEGREE	IP43
LEADS CODE	IV
INSULATION CLASS	B

TORQUE/SPEED CURVE

